

### Jondaryan Rail Loading Facility Air Quality Monitoring Results

Issue Month: July 2017

New Acland Coal Pty Ltd (NAC) undertakes air quality monitoring as part of the environmental monitoring program for the Jondaryan Rail Loading Facility (JRLF). The following air quality data is provided to the Jondaryan community.

Table 1: Dust deposition and compositional monitoring results for June 2017

Site	Dust Deposition (mg/m <sup>2</sup> /day)	EA Criteria (mg/m <sup>2</sup> /day)	Compositional Analysis <sup>1</sup>			Comments
			Major (>20%)	Minor (5% - 20%)	Trace (<5%)	
JD1	10	120	Mineral Material (95%)	Coal (5%)	Insects (<5%), Vegetation (<5%)	Rail and Highway to the north, north-west and north-east. JRLF to north-east. Gravel and dirt immediately surrounding. Bare paddock to north-east, east. Stubble paddock to east, south-east. Residential to north and west. Road with unsealed edges to north-west, north and north-east, unsealed road to landfill to north-east and gravel driveways to north-west.
JD2	20	120	Coal (60%)	Mineral Material (20%), Insects (10%), Vegetation (10%)	N/A	Rail and Highway to north, north-west and north-east. JRLF to the north-east. Grass immediately surrounding. Stubble paddock to south-east. Residential to south and west. Road with unsealed edges to north-east, east, south-east and south. Gravel road to south-east, south, south-west.
JD3	17	120	Mineral Material (40%), Coal (30%)	Vegetation (20%), Insects (10%)	N/A	Highway and Rail to north-west, north, north-east. JRLF to the north-east. Residential surrounding. Grass and garden immediately surrounding. Stubble paddock to south. Road to north-west, north, north-east, east, south-east, south and south-west. Gravel drive to north-east and south.
JD4	60	120	Mineral Material (30%), Polysaccharide Slime (25%)	Insects (20%), Coal (15%), Vegetation (10%)	N/A	Rail, Highway and Jondaryan town to south-east, south, south-west and west. JRLF to the east. Immediate surrounding grass and bare paddock. Bare paddocks to south-west, west, north-west, north, north-east. Stubble paddock to north. Roads to north-east, east, south-east, south, south-west.
JD5	13	120	Mineral Material (60%)	Insects (20%), Coal (10%), Vegetation (10%)	N/A	Rail and Highway to north-west, north, north-east. JRLF to the north-east. Grass immediately surrounding. Stubble paddock to north-east. Residential to east, south and west. Road to north-east, east and south-east.

<sup>1</sup> A semi-qualitative visual analysis of a representative portion of the collected sample which is as consistent as possible (however potentially biased) to that of the complete sample

When measured at a sensitive place, the allowable maximum level of the release of dust from JRLF is 120 milligrams per square metre per day (120 mg/m<sup>2</sup>/day) as stated in JRLF's Environmental Authority (EA). The dust deposition monitors do not distinguish between dust sources. The predominant wind directions for June 2017 were South (27.65%), South-East (24.57) and South-West (15.79%). The predominant wind speeds were light air to light breeze<sup>2</sup>.

<sup>2</sup> Wind speed classification uses the Beaufort scale

Table 2: Quarterly PM<sub>10</sub> monitoring result for 19-20 April 2017<sup>4</sup>

Location	24 Hour PM <sub>10</sub> Result (µg/m <sup>3</sup> )	Long-Term PM <sub>10</sub> average (µg/m <sup>3</sup> )	NEPM Criteria for 24 Hour PM <sub>10</sub> exposure (µg/m <sup>3</sup> )	Comments <sup>3</sup>
Corner of Lagoon and Earl Streets, Jondaryan	16	20	50	"Site downwind of the Jondaryan Coal Stockpile (~1km) for approximately 46.9% of the sampling period."

<sup>3</sup> Taken from monitoring report, with respect to most recent result

<sup>4</sup> PM<sub>10</sub> monitoring is undertaken on a quarterly basis for a nominal

The national 24-hour exposure for PM<sub>10</sub> particulates stated in the National Environment Protection Measure for Ambient Air Quality is 50 micrograms per cubic meter (50 µg/m<sup>3</sup>). The PM<sub>10</sub> monitors do not distinguish between *particulate matter sources*.

### TSP 24 Hour Rolling Average

June 2017

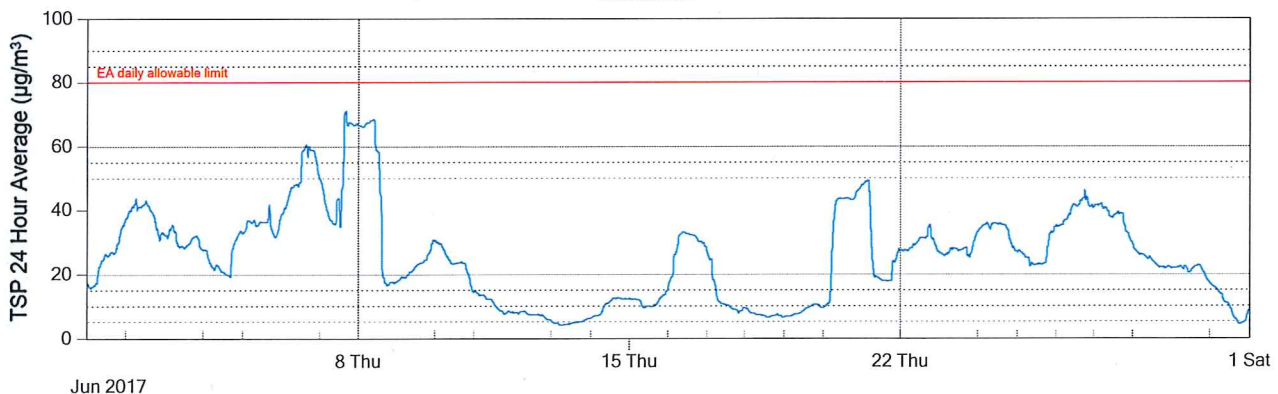


Figure 1: Jondaryan Township TSP continuous monitoring results for June 2017

**Comments:** Ecotech Pty Ltd has been contracted by NAC for the maintenance and data collection at a TEOM site located in the Jondaryan Township which continuously measures Total Suspended Particulate (TSP) matter. When measured at a sensitive place, the maximum level of the release of TSP from the JRLF (24 hour rolling average) is 80 micrograms per cubic metre (80 µg/m<sup>3</sup>) as stated in the JRLF's EA. Any exceedances of this limit are displayed in Figure 1 (above) The TEOM does not distinguish between particulate matter sources. The predominant wind directions for June 2017 were South (27.65%), South-East (24.57) and South-West (15.79%). The predominant wind speeds were light air to light breeze. The TEOM unit availability for TSP determination was 99.6% of the sample period.


If there are any queries regarding the air quality monitoring undertaken for the Jondaryan Rail Loading Facility please contact Rob Rashleigh at the New Acland Coal Mine during business hours on 4694 8888.

Issued by:

Robert Rashleigh

CHPP Manager – Coal Operations

New Acland Coal Pty Ltd

  
Date: 28/07/17